


Touch-Plate® Lighting Controls

CPS-1065 ON/OFF to Maintain Board

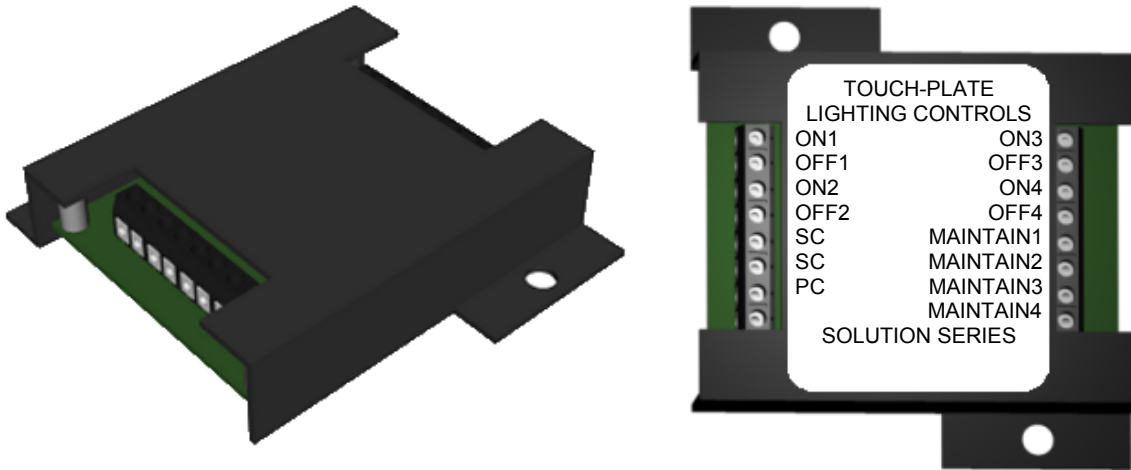

The CPS-1065 ON – OFF to MAINTAIN allows 4 discrete channels of conversion from momentary separate ON and OFF inputs to maintained outputs. By connecting the UP and DOWN momentary switches and the top and bottom limit switches, a motor can be controlled to raise and lower curtains.

Power


The unit receives power by connecting the SC and PC terminals on the left side of the module to the CPS relay panel's switch common or pilot common. The +5 terminal should never be connected.

Outputs

The outputs on the lower right side of the module are the MAINTAIN signal outputs of the module. They should be wired to the MAINTAIN inputs of the CPS/CPSP panel.

Inputs

The eight input terminals are to be connected to momentary contacts or switches connected to CPS/CPSP switch common. These are the ON and OFF inputs.



Touch-Plate® Lighting Controls

1830 Wayne Trace
Fort Wayne, IN 46803

Phone: 260-424-4323
Fax: 260-420-3651

Sales Support Email: sales@touchplate.com
World Wide Web: <http://www.touchplate.com>