

ZONES

Only 2 low voltage wires required per control station (power and data are combined)

Flexible Wiring—star, daisy chain, or combination of both

Cable runs up to 500ft, with a max of either 7 control stations) on the same cable run

Led color and intensity are configurable

DMX interfacing


Manual overrides

Grouping and Scene control

Timed Relay Functions

Modbus RTU RS485 Interface

HIGHLIGHTS

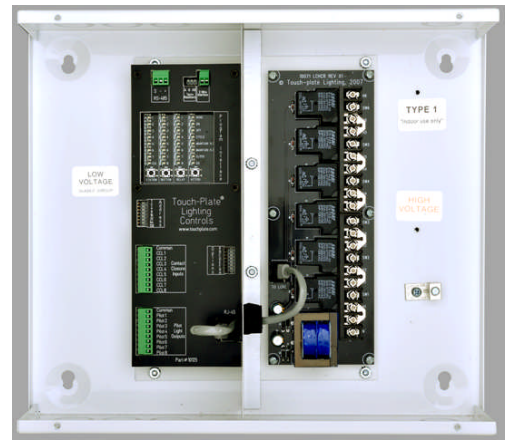

Model:
ZoneZ-2W-71-6RP




Model:
ULT-2B-2L-
2W-SS-ALM

TOUCH-PLATE®

Lighting Controls



How To Order

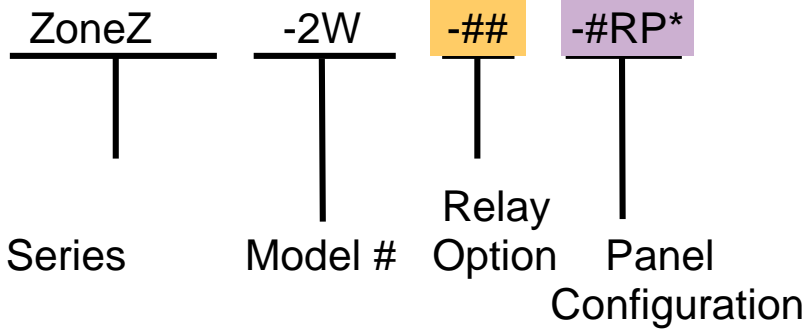

*If interested for use in a Commercial Application, please contact the factory for details



Model: ULT-2B-2L-2W-SS-ALM

Model Options

Model #	Description
-2W	2 Wire Capability

Relay Options

Relay Option	Description
-71	UL Listed 20 AMPS Tungsten & Ballast
-72	UL Listed 25 AMPS Tungsten & Ballast

Panel Configurations Available

Panel Configuration	Enclosure Dimension
-6RP	6 Relay Panel 12"L x 14"W x 3 3/4"H
-12RP	12 Relay Panel 21 1/2"L x 14"W x 3 3/4"H
-18RP	18 Relay Panel *Call for Dimensions
-24RP	24 Relay Panel *Call for Dimensions
-30RP	30 Relay Panel *Call for Dimensions
-36RP	36 Relay Panel *Call for Dimensions

Additional Features


- Supports connection to 7 2-Wire Control Stations
- Each button can control its own scene
- Onboard Configuration Keypad
- Electronic Stuck Switch Protection
- Phone Support for 3 years
- Silent Relays



Model: 10125 Relay Control Board



Model: 10071 Relay Board

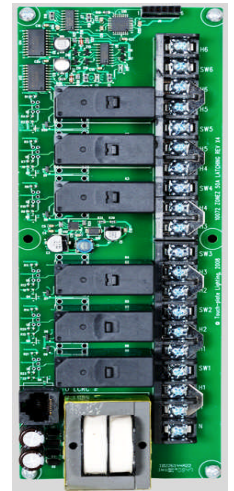

Model: 10072 Relay Board



TOUCH-PLATE®

Touch-Plate / 1830 Wayne Trace / Fort Wayne, IN 46803 /

Email: csr@touchplate.com / Phone: 260-424-4323 or 260-426-1565 / Fax: 260-426-1442

<http://www.touchplate.com>