## Touch-Plate®

## Lighting Controls



## The ZoneZ-RP:

Touch-Plate<sup>®</sup> Lighting Controls ZoneZ-RP is the single point lighting control solution for hospitals, hotels, and all other projects requiring remotely installed relays.


A ZoneZ-RP is a complete relay and power supply, making ZoneZ-RP a stand-alone solution for any lighting load that needs to be controlled from more than one location.

ZoneZ-RP is available in two styles, a plastic case with threaded nipple or mounted on a metal sub-plate, depending on the installer's preference.

It is available as a momentary contact switching device or a maintain contact switching device; normally open or normally closed. It will work perfectly as a power pack for any occupancy sensor or as an Automatic OFF

## **ZoneZ-RP Features:**


- •Multi-Way Switching, which allows for ZoneZ-RP to be controlled by multiple control stations
- •LED / Pilot Output, which allows the use of control stations with LEDs.
- Switches 120VAC
- •Operates a 20 AMP Relay.
- •Two distinct designs, one is threaded nipple to junction box, the other is mounted on metal subplate for mounting into a 4 x 4 handy box.
- •Electronic Stuck Switch Protection
- •Free phone support
- •Wiring follows historical Touch-Plate® colors; Orange for Cycle Switch, Blue for LED Status Output, and White for both Commons
- •UL listed 20 AMP Relay and Transformer

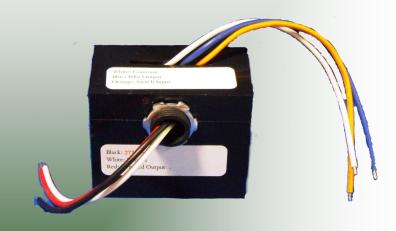

**ZNZ-RP-20-NM Pictured Above with Case** 




**ZNZ-RP-20-PM Pictured Above with Subplate** 



Control Stations with LEDs can be used

Touch-Plate<sup>®</sup> Lighting Controls 4822 Projects Dr - Fort Wayne, IN 46825 Phone: 260-426-1565 - Fax: 260-426-1442

Email: csr@touchplate.com Web: http://www.touchplate.com

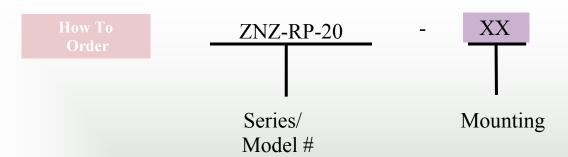

| Configurations<br>Available | Mounting<br>Configurations | <u>Dimensions</u>   |
|-----------------------------|----------------------------|---|
|                             | -NM                        | 3.325"L x 2.76"W x 1.89"D (w/o threaded nipple) or 2.27"D (w/threaded nipple) |
|                             | -PM                        | 3.85"L x 2.62"W (w/o mounting tabs) or 2.76"W (w/mounting tabs) x 1.45"D      |

